


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:119.99V I:0.0931A P:10.954W PF:0.9808 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1192.32x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: MAGICLITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 108.85 lm/W			
MODEL	RGL-FR-5CCT-4-WH	I _{max} (cd)	431.8	S/MH(C0/180)	1.26
NOMINAL POWER(W)	12	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	1192.3	η UP,DN(C0-180)	0.0,50.1
NOMINAL FLUX(lm)	1192.32	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.9
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

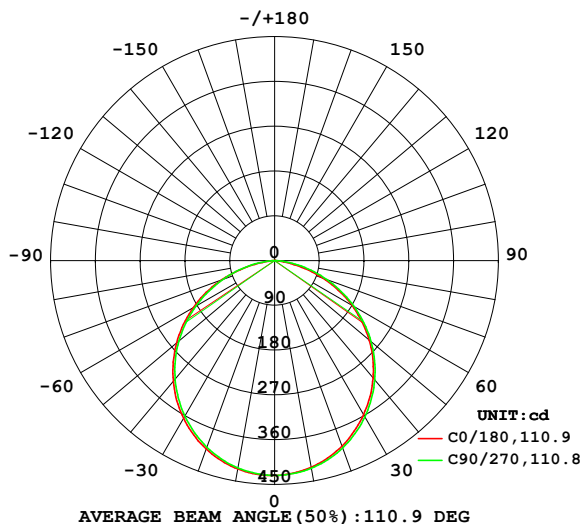

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

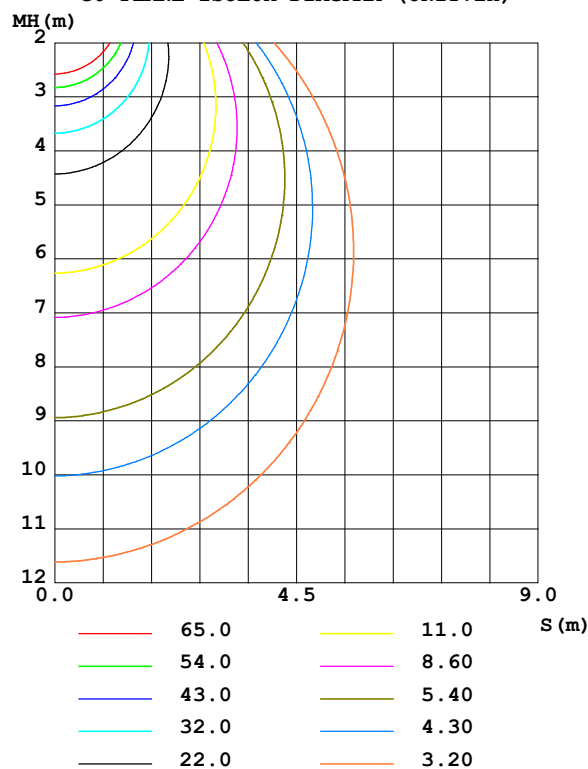

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2024-12-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.087m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	422.0	422.5	423.8	424.8	425.4	424.2	423.2	422.0	0- 10	40.81	40.81	3.42,3.42
20	396.6	398.1	400.6	402.0	402.8	401.3	399.1	397.0	10- 20	116.7	157.5	13.2,13.2
30	357.7	360.1	362.9	365.0	366.3	363.8	360.9	358.7	20- 30	176.2	333.7	28,28
40	308.1	310.0	313.1	315.5	316.8	314.1	311.1	309.2	30- 40	211.7	545.3	45.7,45.7
50	248.3	250.2	253.4	255.9	257.1	254.4	251.4	249.7	40- 50	218.6	764.0	64.1,64.1
60	179.6	181.5	184.4	187.0	188.5	185.7	182.4	180.9	50- 60	195.6	959.5	80.5,80.5
70	102.8	107.4	111.7	113.8	112.5	112.2	109.9	107.2	60- 70	145.5	1105	92.7,92.7
80	25.77	32.61	42.19	38.39	32.99	36.30	40.62	32.62	70- 80	76.05	1181	99.1,99.1
90	0.4078	0.4498	0.6169	0.4587	0.2700	0.2663	0.3684	0.2737	80- 90	11.24	1192	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.99V I:0.0931A P:10.954W PF:0.9808 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1192.32x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: MAGICLITE	SUR.:	Shielding Angle:

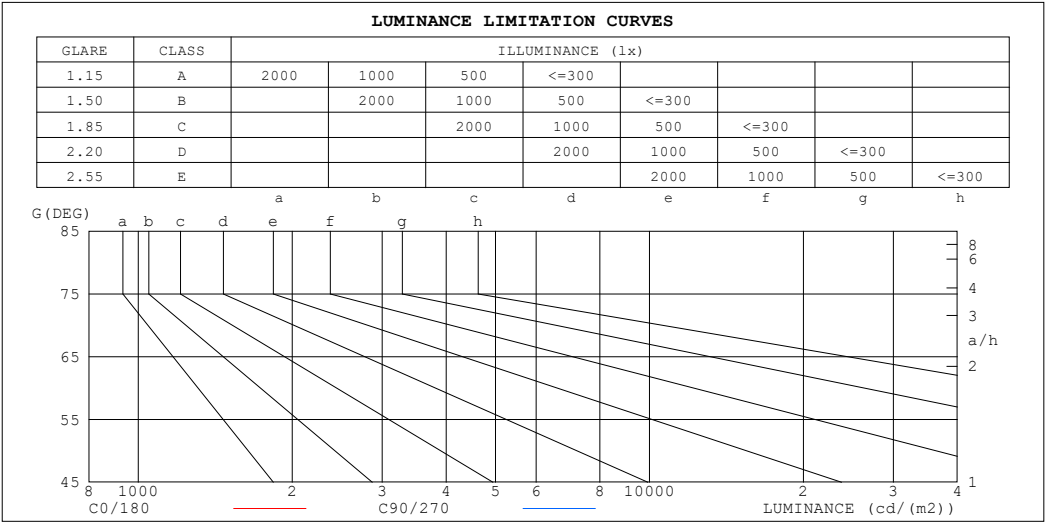

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	84318	426592
80	472612	773756
75	785075	938165
70	957035	1039830
65	1069031	1116820
60	1144204	1174452
55	1190992	1219405
50	1230000	1255430
45	1258969	1281303


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2024-12-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.087m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.99V I:0.0931A P:10.954W PF:0.9808 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1192.32x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: MAGICLITE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.05	1.00	.97	1.02	.99	.95	.98	.95	.92	.94	.92	.89	.91	.89	.87	.85														
2.0	.91	.85	.79	.89	.83	.78	.86	.81	.76	.83	.78	.74	.80	.76	.73	.71														
3.0	.80	.72	.66	.79	.71	.65	.76	.69	.64	.73	.67	.63	.70	.66	.62	.60														
4.0	.71	.62	.56	.70	.62	.55	.67	.60	.55	.65	.59	.54	.63	.57	.53	.51														
5.0	.63	.55	.48	.62	.54	.48	.60	.53	.47	.58	.52	.47	.56	.51	.46	.44														
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.53	.46	.41	.51	.45	.41	.38														
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.37	.48	.41	.36	.47	.41	.36	.34														
8.0	.47	.39	.33	.47	.38	.33	.45	.38	.33	.44	.37	.32	.43	.37	.32	.30														
9.0	.43	.35	.30	.43	.35	.30	.42	.34	.29	.41	.34	.29	.40	.34	.29	.27														
10.0	.40	.32	.27	.40	.32	.27	.39	.32	.27	.38	.31	.27	.37	.31	.26	.25														

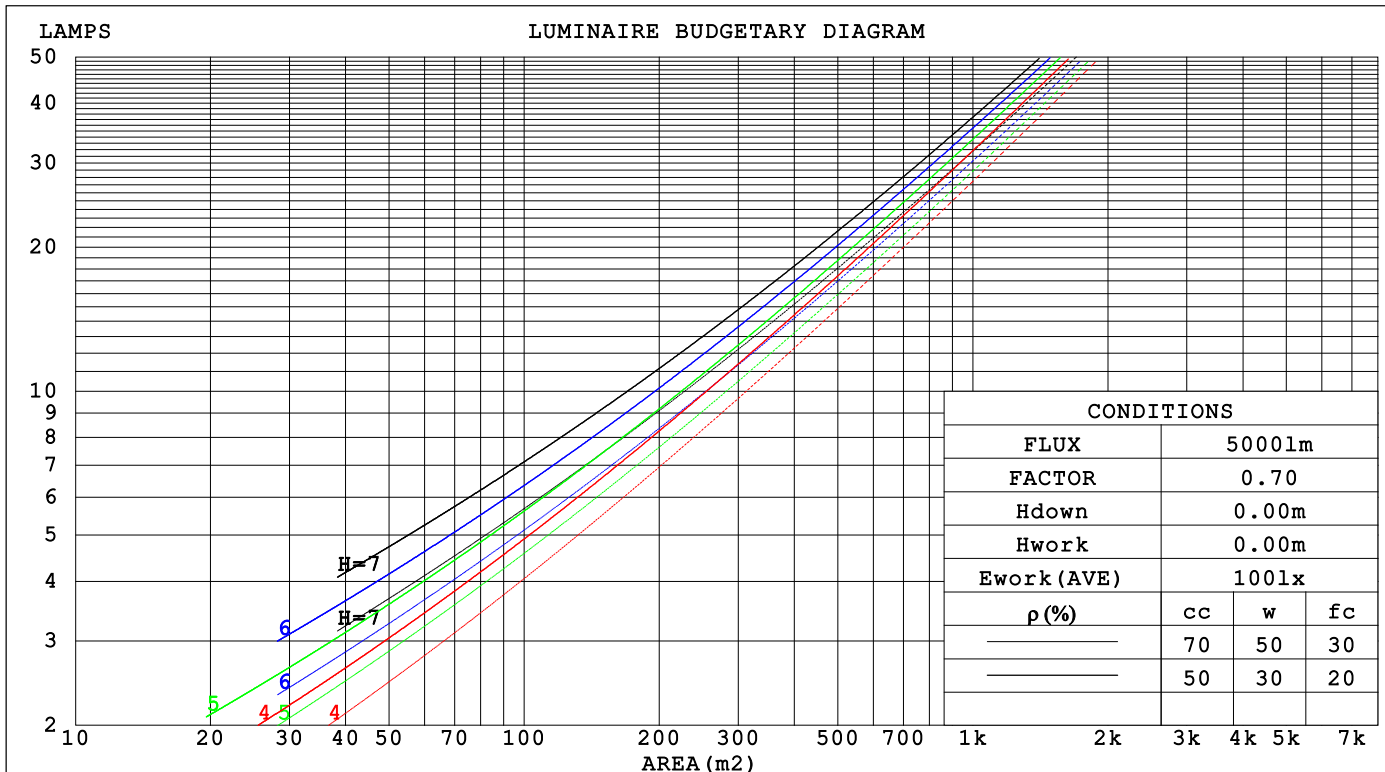

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2024-12-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.087m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:119.99V I:0.0931A P:10.954W PF:0.9808 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1192.32x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: MAGICLITE	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.296	.169	.053	.289	.165	.052	.276	.158	.051	.264	.152	.049	.253	.147	.047		
2.0	.284	.155	.048	.278	.153	.047	.266	.148	.046	.255	.143	.045	.245	.139	.044		
3.0	.265	.141	.042	.259	.139	.042	.249	.135	.041	.239	.131	.040	.230	.128	.039		
4.0	.245	.127	.037	.240	.126	.037	.231	.123	.037	.223	.120	.036	.215	.117	.036		
5.0	.227	.116	.034	.223	.115	.033	.215	.112	.033	.208	.110	.033	.200	.107	.032		
6.0	.211	.106	.030	.208	.105	.030	.200	.103	.030	.194	.101	.030	.187	.099	.029		
7.0	.197	.097	.028	.194	.096	.027	.187	.095	.027	.181	.093	.027	.176	.091	.027		
8.0	.184	.090	.025	.181	.089	.025	.175	.088	.025	.170	.086	.025	.165	.085	.025		
9.0	.173	.084	.023	.170	.083	.023	.165	.082	.023	.160	.080	.023	.155	.079	.023		
10.0	.163	.078	.022	.160	.077	.022	.156	.076	.021	.151	.075	.021	.147	.074	.021		

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients (CCEC)										
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020		
1.0	.179	.156	.135	.153	.134	.117	.105	.092	.081	.060	.053	.047	.019	.017	.015		
2.0	.171	.132	.099	.147	.114	.086	.100	.079	.060	.058	.046	.035	.019	.015	.011		
3.0	.163	.114	.075	.140	.099	.065	.096	.068	.046	.056	.040	.027	.018	.013	.009		
4.0	.156	.101	.059	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007		
5.0	.149	.090	.048	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006		
6.0	.141	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005		
7.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004		
8.0	.128	.069	.029	.111	.060	.025	.076	.042	.018	.044	.025	.011	.014	.008	.004		
9.0	.122	.064	.025	.105	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003		
10.0	.117	.060	.023	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2024-12-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.087m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.99V I:0.0931A P:10.954W PF:0.9808 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1192.32x1 lm										
NAME: RGL-FR-5CCT-4-WH					TYPE:			WEIGHT:		
SPEC.: 3000K					DIM.:			SERIAL No.:		
MFR.: MAGICLITE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	37.5	39.0	37.8	39.2	39.4	37.6	39.1	37.9	39.3	39.5
3H	38.8	40.2	39.1	40.4	40.7	39.0	40.4	39.3	40.7	40.9
4H	39.3	40.6	39.6	40.8	41.1	39.6	40.9	39.9	41.2	41.4
6H	39.4	40.7	39.8	40.9	41.2	39.9	41.2	40.3	41.4	41.7
8H	39.4	40.6	39.7	40.9	41.2	40.0	41.2	40.3	41.5	41.8
12H	39.4	40.5	39.7	40.8	41.1	40.0	41.2	40.3	41.4	41.7
4H 2H	38.1	39.4	38.4	39.6	39.9	38.2	39.5	38.5	39.7	40.0
3H	39.6	40.7	39.9	41.0	41.3	39.8	40.9	40.1	41.2	41.5
4H	40.1	41.2	40.5	41.5	41.8	40.4	41.5	40.8	41.8	42.1
6H	40.4	41.3	40.8	41.6	42.0	40.9	41.8	41.3	42.2	42.5
8H	40.4	41.2	40.8	41.6	42.0	41.0	41.8	41.4	42.2	42.6
12H	40.3	41.1	40.7	41.5	41.9	41.0	41.8	41.4	42.2	42.6
8H 4H	40.3	41.2	40.7	41.6	41.9	40.6	41.5	41.0	41.8	42.2
6H	40.6	41.4	41.1	41.8	42.2	41.1	41.9	41.6	42.3	42.7
8H	40.7	41.3	41.1	41.7	42.2	41.3	41.9	41.8	42.4	42.8
12H	40.6	41.2	41.1	41.6	42.1	41.4	41.9	41.8	42.3	42.8
12H 4H	40.3	41.1	40.7	41.5	41.9	40.6	41.4	41.0	41.8	42.2
6H	40.7	41.3	41.1	41.7	42.2	41.1	41.8	41.6	42.2	42.7
8H	40.7	41.2	41.2	41.7	42.1	41.3	41.9	41.8	42.3	42.8
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H	+ 0.3 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 1192 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 0.6)
Area: 0.000314 m2

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2024-12-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.087m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.99V I:0.0931A P:10.954W PF:0.9808 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1192.32x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: MAGICLITE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	47	40	57	46	40	56	46	39	33
0.80	68	57	49	67	56	49	65	56	49	42
1.00	77	66	59	76	65	58	73	67	58	51
1.25	84	74	67	82	73	66	80	71	65	58
1.50	89	79	72	87	78	72	84	77	71	63
2.00	96	87	81	94	86	80	90	84	79	71
2.50	100	92	86	98	91	85	94	88	83	75
3.00	103	96	91	101	95	90	97	92	88	79
4.00	107	101	97	104	100	95	100	96	93	84
5.00	109	105	101	107	103	99	102	99	96	87
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 24.3 °C
Operators:
Test Date: 2024-12-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity: 65.0%
Test Distance: 3.087m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:119.99V I:0.0931A P:10.954W PF:0.9808 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1192.32x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: MAGICLITE	SUR.:	Shielding Angle:

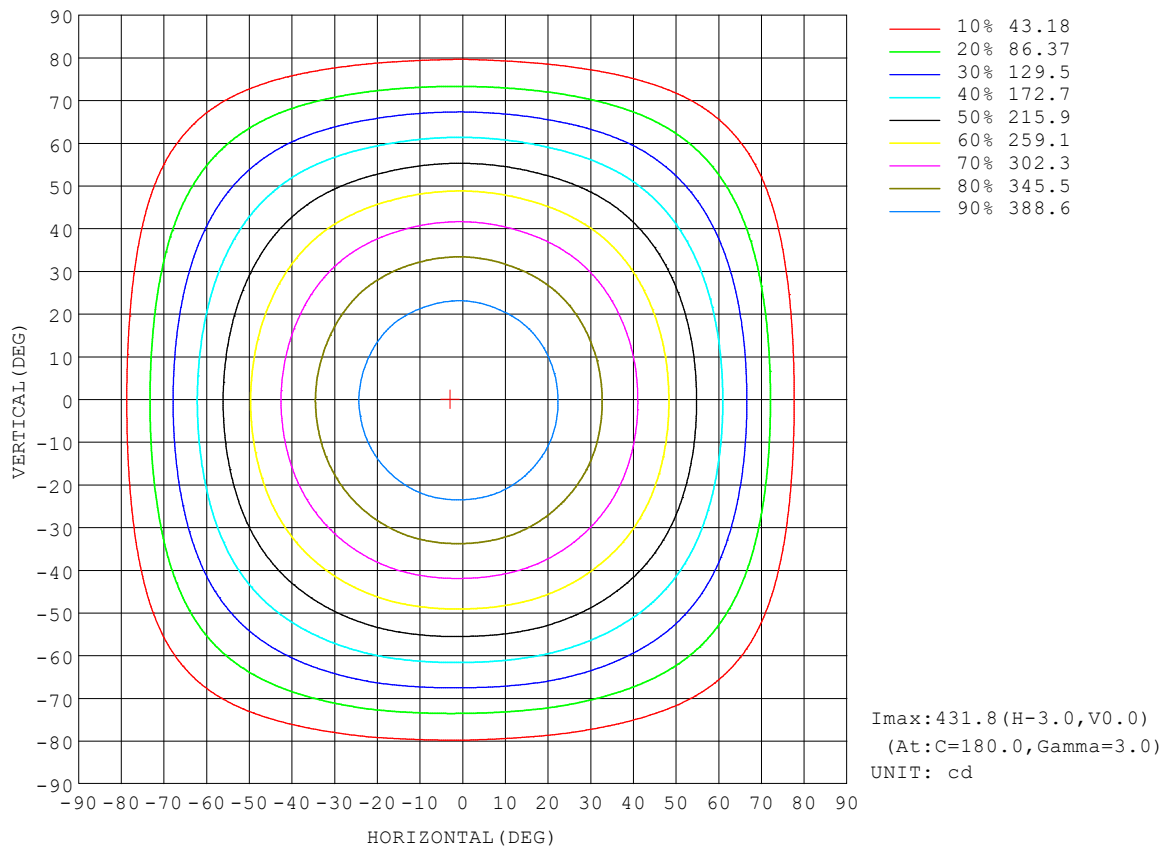


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2024-12-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.087m [K=1.0000]
Remarks:

AAI CURVES

Test:U:119.99V I:0.0931A P:10.954W PF:0.9808 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1192.32x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: MAGICCLITE	SUR.:	Shielding Angle:

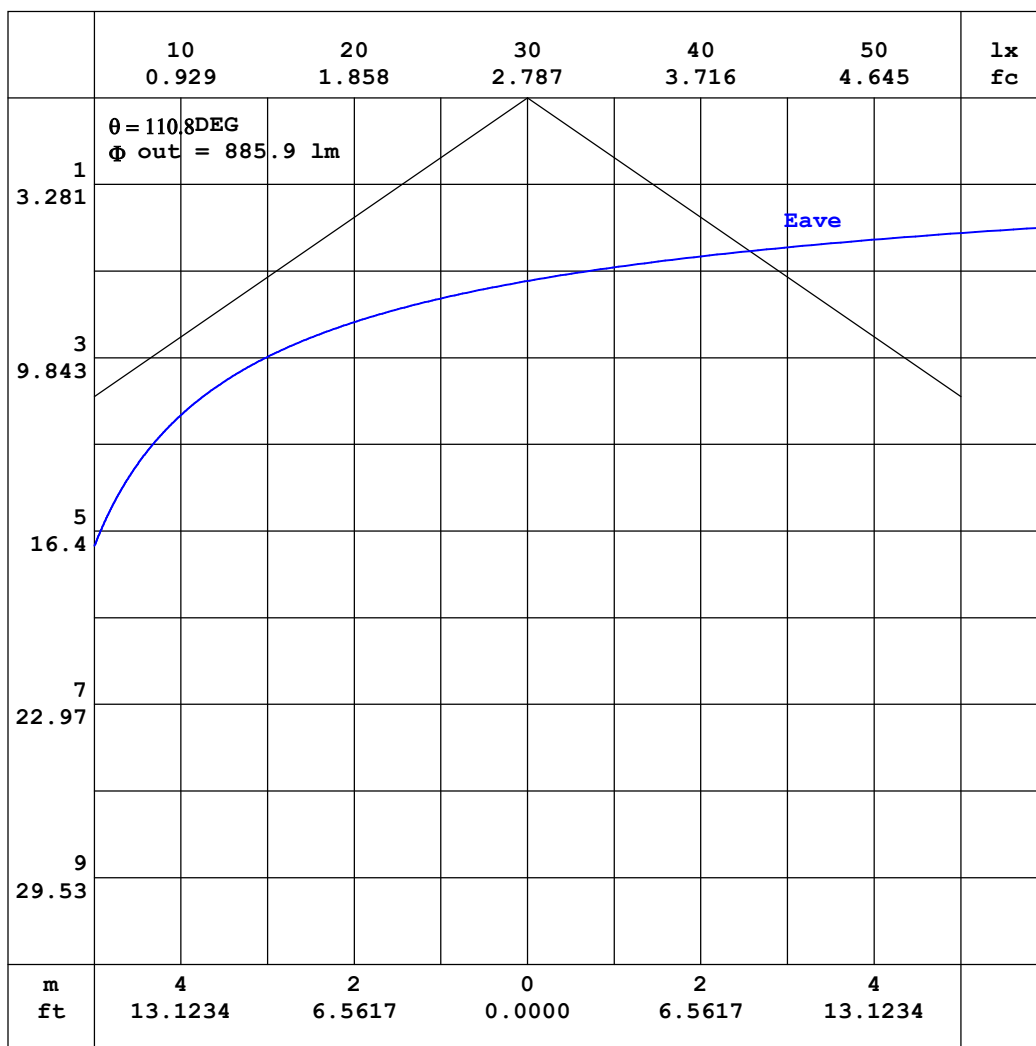


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 24.3°C
Operators:
Test Date: 2024-12-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity: 65.0%
Test Distance: 3.087m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:119.99V I:0.0931A P:10.954W PF:0.9808 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1192.32x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: MAGICLITE	SUR.:	Shielding Angle:

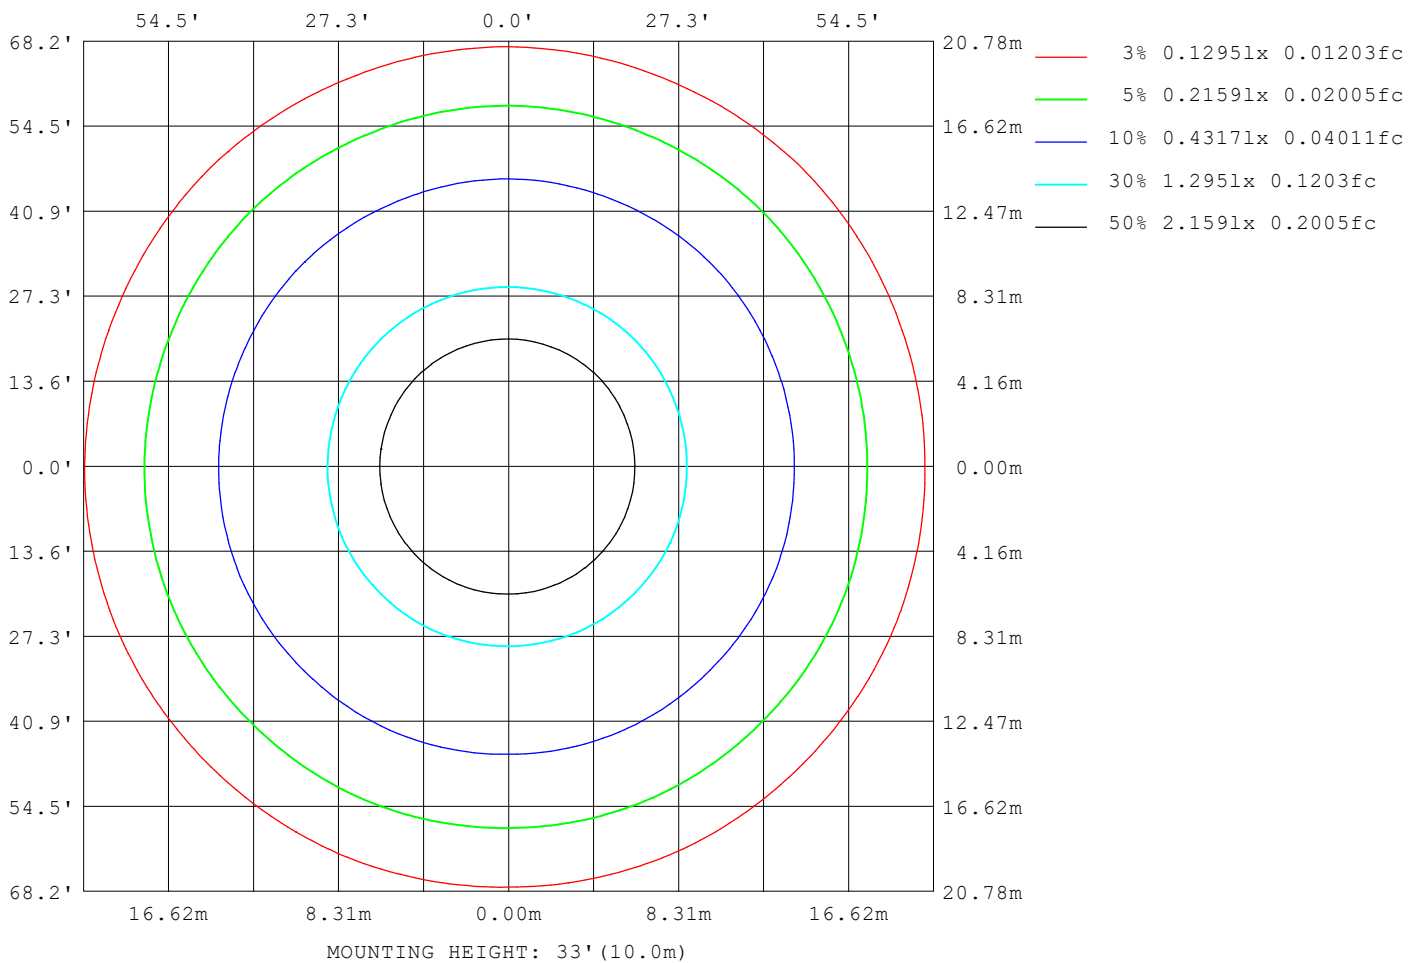

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 24.3°C
Operators:
Test Date: 2024-12-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity: 65.0%
Test Distance: 3.087m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:119.99V I:0.0931A P:10.954W PF:0.9808 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1192.32x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: MAGICLITE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1106792
L_0~180 (75) av	838213
L_0~180 (85) av	97486
L_90~270 (65) av	1109277
L_90~270 (75) av	926015
L_90~270 (85) av	397810
L_45 (65) av	1112084
L_45 (75) av	888743
L_45 (85) av	153260

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:24.3℃
Operators:
Test Date:2024-12-11

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.087m [K=1.0000]
Remarks:

Planar Illuminance Curve

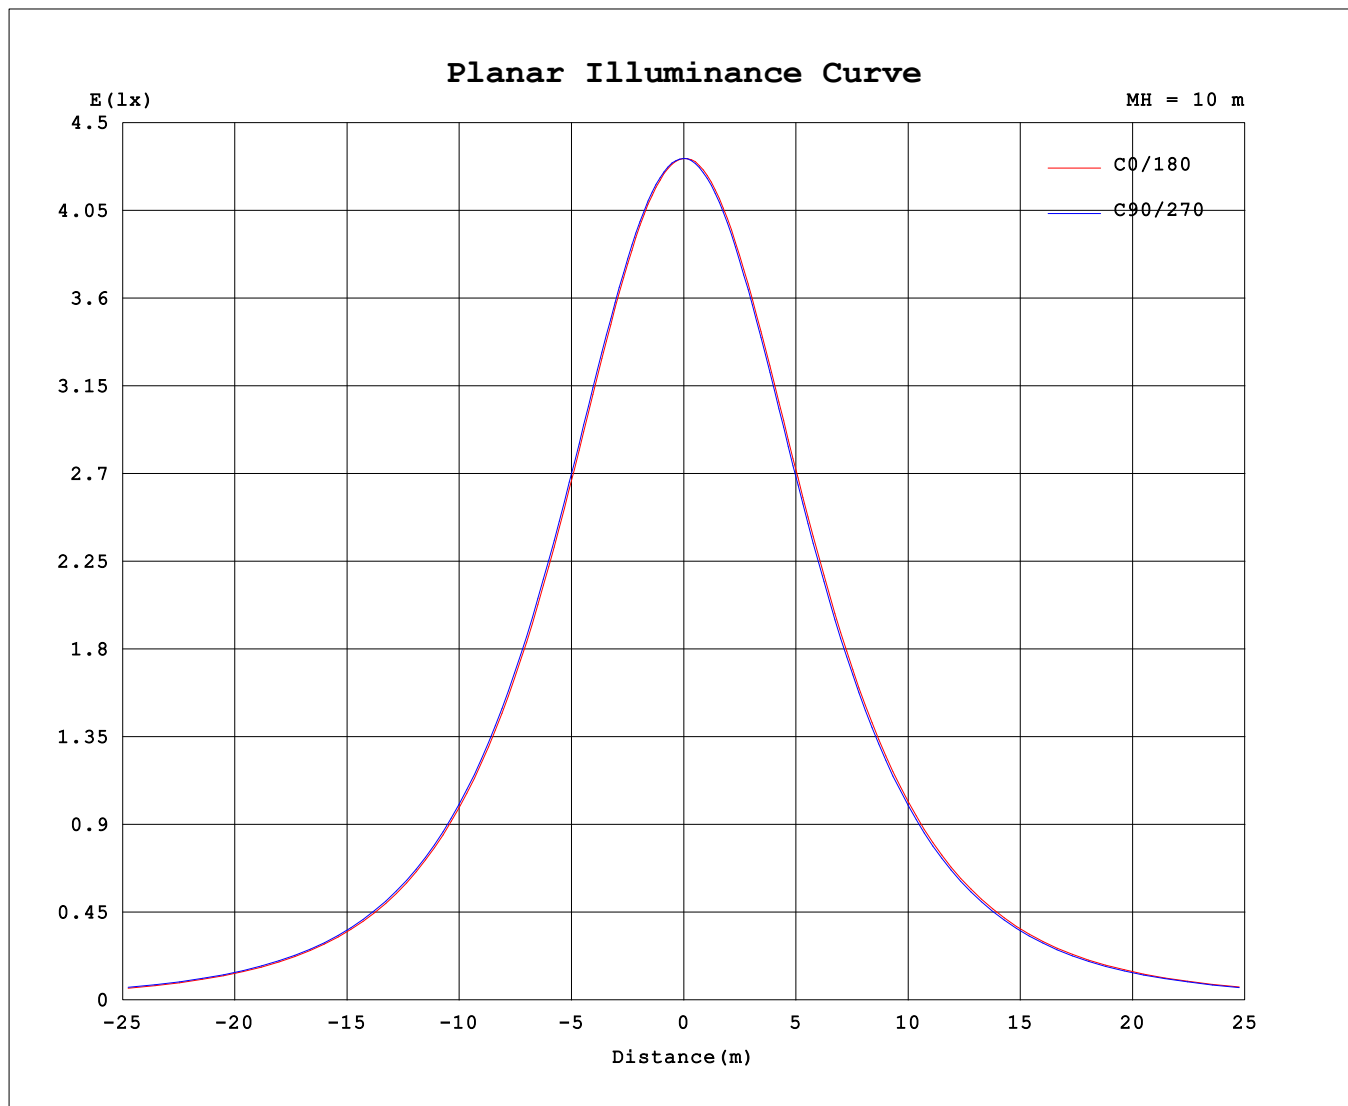

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.087m [K=1.0000]
 Remarks:

Test:U:119.99V I:0.0931A P:10.954W PF:0.9808 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1192.32x1 lm		
NAME: RGL-FR-5CCT-4-WH	TYPE:	WEIGHT:
SPEC.: 3000K	DIM.:	SERIAL No.:
MFR.: MAGICLITE	SUR.:	Shielding Angle:

UNIT: cd

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 24.3℃
Operators:
Test Date: 2024-12-11

```

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Humidity:65.0%
Test Distance:3.087m [K=1.0000]
Remarks:

```