
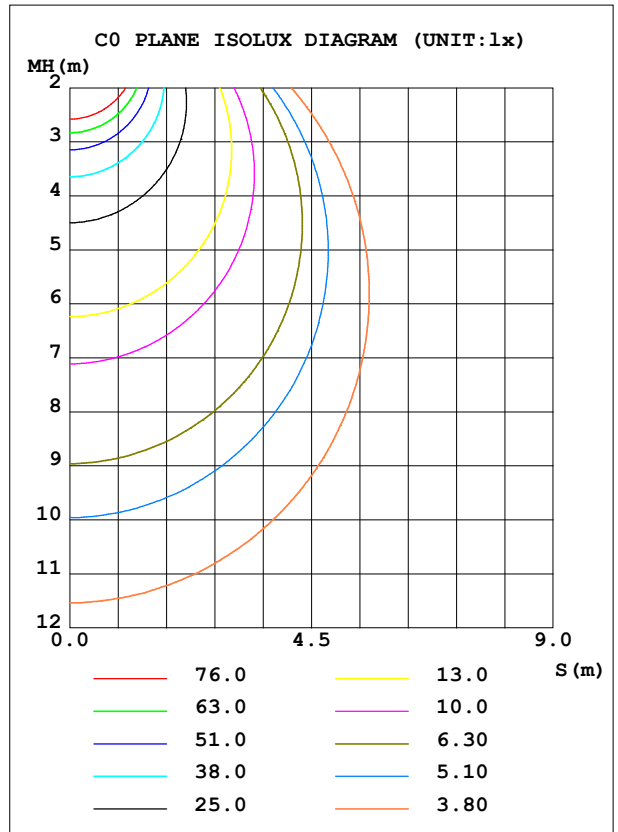


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.78V I:0.1065A P:12.551W PF:0.9843 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1430.16x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	RGL-FR-5CCT-6-WH	Imax (cd)	505.7	S/MH (C0/180)	1.26
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	1.25
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1430.2	η UP, DN (C0-180)	0.0, 50.3
NOMINAL FLUX (lm)	1430.16	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.7
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35

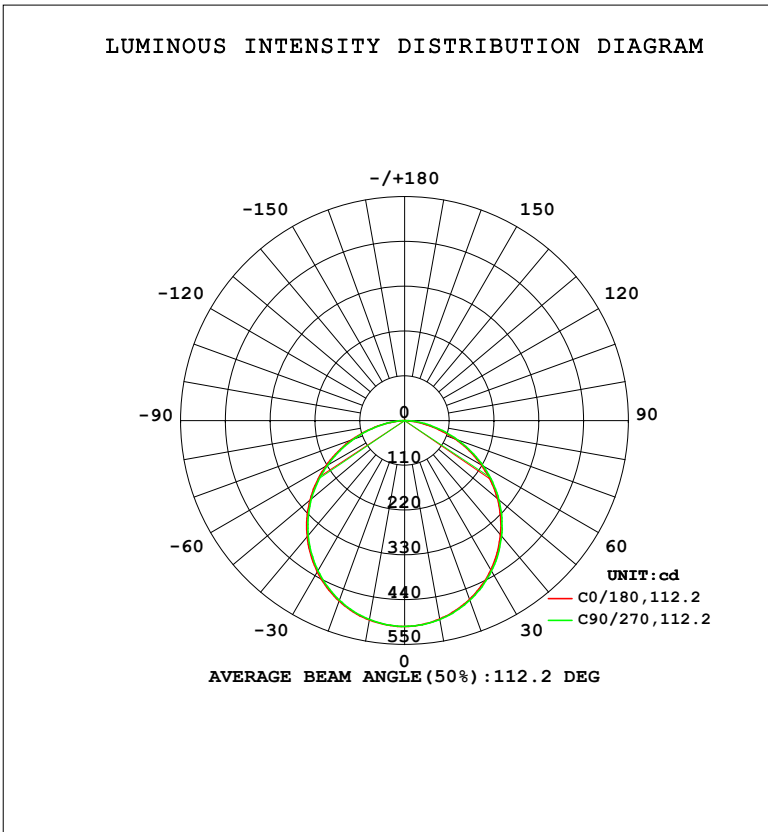

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.087m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	495.0	495.2	496.4	496.6	497.4	497.0	496.2	495.4	0- 10	47.80	47.80	3.34,3.34
20	467.1	467.9	469.2	470.7	471.4	470.5	469.2	468.0	10- 20	136.9	184.7	12.9,12.9
30	423.8	425.4	427.1	428.6	429.4	427.8	426.1	424.5	20- 30	207.3	392.0	27.4,27.4
40	366.3	369.0	370.8	371.9	372.7	370.8	368.5	367.3	30- 40	250.0	642.0	44.9,44.9
50	297.5	300.3	302.4	302.7	303.5	301.1	298.9	297.8	40- 50	259.5	901.5	63,63
60	217.8	220.8	223.1	223.0	223.5	220.8	218.5	217.6	50- 60	233.7	1135	79.4,79.4
70	132.3	136.4	138.4	138.2	137.7	135.2	132.6	132.0	60- 70	176.3	1312	91.7,91.7
80	47.15	52.79	57.51	55.52	51.30	51.07	51.49	48.52	70- 80	98.02	1410	98.6,98.6
90	0.5608	0.5876	0.9512	0.5839	0.3573	0.3759	0.4141	0.3770	80- 90	20.60	1430	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3 °C
 Operators:
 Test Date:2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.78V I:0.1065A P:12.551W PF:0.9843 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1430.16x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:

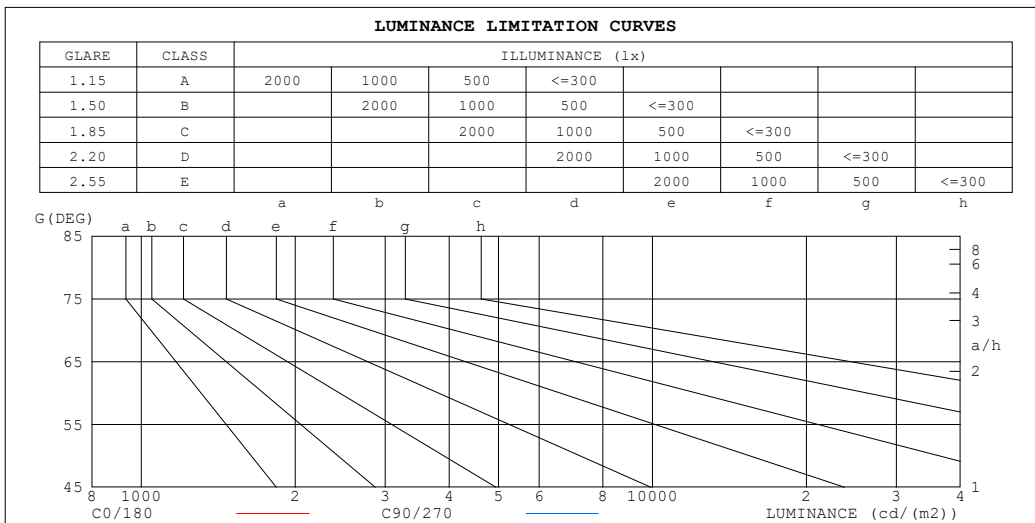

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	362174	836876
80	864687	1054826
75	1089352	1191976
70	1232320	1288411
65	1322166	1364426
60	1387198	1420956
55	1437237	1465343
50	1473742	1498131
45	1503144	1523366


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3°C
 Operators:
 Test Date: 2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.087m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.78V I:0.1065A P:12.551W PF:0.9843 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1430.16x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	.00	.96	1.02	.98	.95	.98	.94	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.83	.77	.85	.80	.75	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.71	.65	.78	.70	.64	.75	.69	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.71	.62	.55	.69	.61	.55	.67	.59	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.46	.58	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.51	.45	.40	.38
7.0	.51	.43	.36	.51	.42	.36	.49	.41	.36	.48	.41	.36	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.44	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.26	.39	.32	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

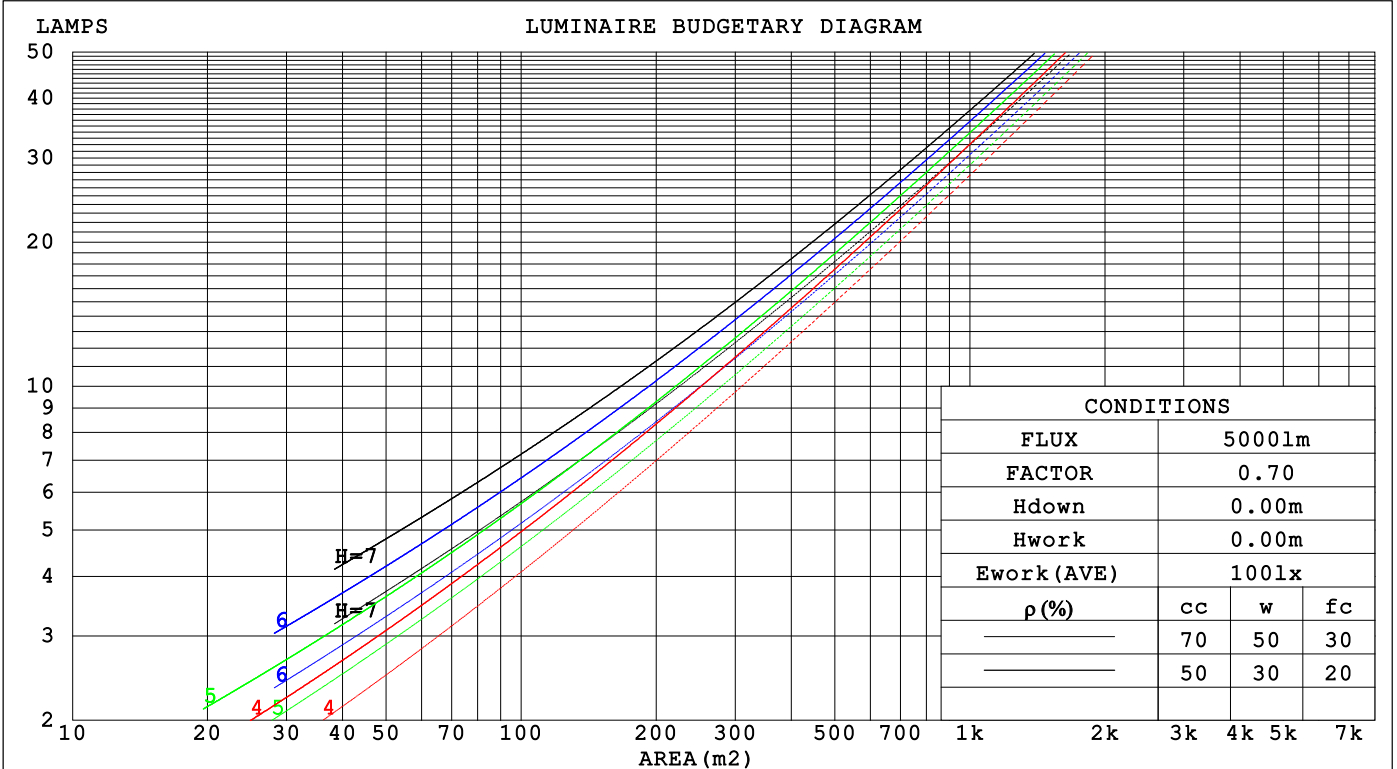

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.78V I:0.1065A P:12.551W PF:0.9843 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1430.16x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.305	.173	.055	.297	.170	.054	.284	.163	.052	.272	.157	.050	.261	.151	.049	
2.0	.289	.158	.049	.283	.156	.048	.271	.151	.047	.260	.146	.046	.250	.142	.045	
3.0	.268	.143	.043	.263	.141	.042	.252	.137	.042	.243	.133	.041	.234	.130	.040	
4.0	.248	.129	.038	.243	.127	.038	.234	.124	.037	.225	.121	.037	.218	.118	.036	
5.0	.230	.117	.034	.225	.116	.034	.217	.113	.033	.210	.111	.033	.202	.108	.033	
6.0	.213	.107	.031	.209	.106	.030	.202	.104	.030	.195	.101	.030	.189	.099	.030	
7.0	.198	.098	.028	.195	.097	.028	.188	.095	.027	.182	.094	.027	.177	.092	.027	
8.0	.185	.091	.025	.182	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.163	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0																
1.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
2.0	.180	.156	.135	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015	
3.0	.172	.132	.098	.147	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
4.0	.164	.114	.075	.141	.099	.065	.097	.068	.045	.056	.040	.027	.018	.013	.009	
5.0	.157	.101	.058	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
6.0	.149	.091	.047	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006	
7.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
8.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
9.0	.129	.069	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.004	
10.0	.123	.065	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.78V I:0.1065A P:12.551W PF:0.9843 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1430.16x1 lm										
NAME: RGL-FR-5CCT-6-WH					TYPE:			WEIGHT:		
SPEC.: 3500K					DIM.:			SERIAL No.:		
MFR.: MAGIC LITE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	38.2	39.7	38.4	39.9	40.1	38.3	39.8	38.5	40.0	40.2
3H	39.6	41.0	39.9	41.3	41.5	39.8	41.2	40.1	41.4	41.6
4H	40.2	41.5	40.5	41.8	42.0	40.4	41.7	40.7	41.9	42.2
6H	40.5	41.7	40.8	42.0	42.3	40.8	42.0	41.1	42.3	42.6
8H	40.6	41.8	40.9	42.0	42.3	40.9	42.1	41.2	42.4	42.7
12H	40.5	41.7	40.9	42.0	42.3	41.0	42.1	41.3	42.4	42.7
4H 2H	38.8	40.1	39.1	40.4	40.6	38.8	40.2	39.2	40.4	40.7
3H	40.4	41.6	40.8	41.9	42.2	40.5	41.7	40.9	42.0	42.3
4H	41.1	42.2	41.5	42.5	42.8	41.3	42.3	41.6	42.7	43.0
6H	41.5	42.5	41.9	42.8	43.2	41.8	42.8	42.2	43.1	43.5
8H	41.6	42.5	42.0	42.9	43.2	42.0	42.9	42.4	43.2	43.6
12H	41.6	42.4	42.1	42.8	43.2	42.1	42.9	42.5	43.3	43.7
8H 4H	41.3	42.2	41.8	42.6	43.0	41.5	42.4	41.9	42.8	43.1
6H	41.9	42.6	42.3	43.0	43.5	42.2	42.9	42.6	43.3	43.7
8H	42.1	42.7	42.5	43.1	43.6	42.4	43.1	42.9	43.5	43.9
12H	42.1	42.7	42.6	43.1	43.6	42.6	43.1	43.1	43.6	44.1
12H 4H	41.4	42.2	41.8	42.5	43.0	41.5	42.3	41.9	42.7	43.1
6H	41.9	42.6	42.4	43.0	43.5	42.2	42.9	42.7	43.3	43.7
8H	42.1	42.7	42.6	43.1	43.6	42.5	43.0	43.0	43.5	44.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 1430 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 1.2)
 Area: 0.000314 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.78V I:0.1065A P:12.551W PF:0.9843 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1430.16x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	49	65	55	48	41
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	65	79	71	65	57
1.50	88	78	72	87	78	71	84	76	70	62
2.00	95	87	80	93	86	80	90	83	78	70
2.50	99	91	85	97	90	85	93	87	83	74
3.00	102	96	90	100	94	89	96	91	87	79
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	99	102	99	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.78V I:0.1065A P:12.551W PF:0.9843 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1430.16x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:

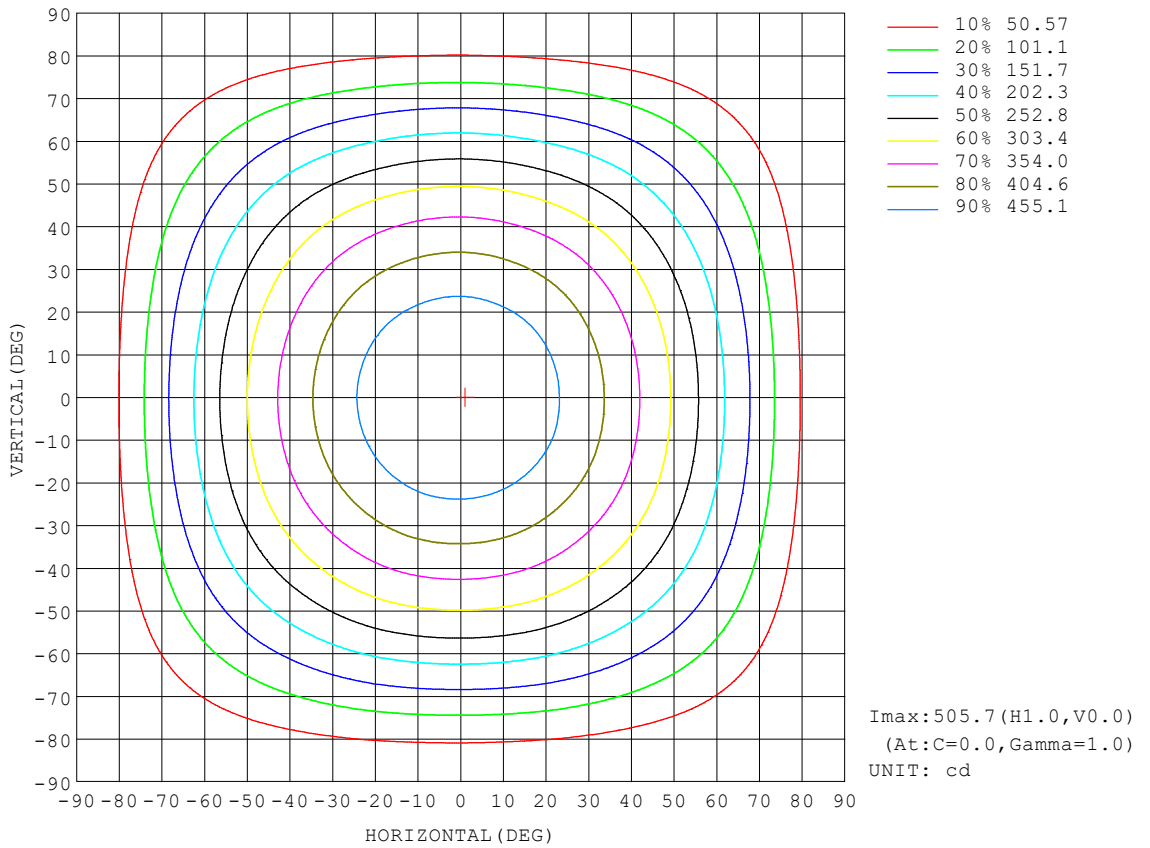


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks:

AAI CURVES

Test:U:119.78V I:0.1065A P:12.551W PF:0.9843 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1430.16x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:

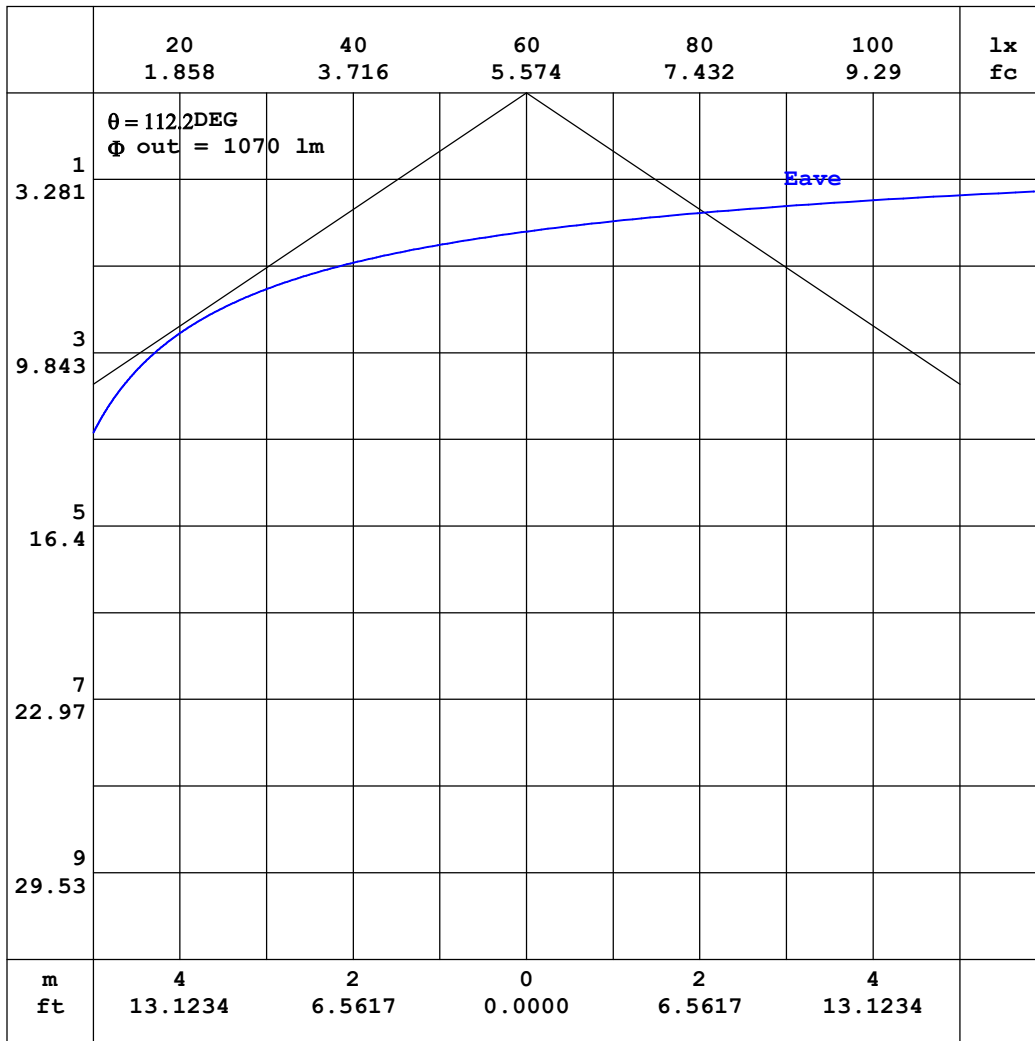


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3°C
 Operators:
 Test Date: 2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.087m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.78V I:0.1065A P:12.551W PF:0.9843 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1430.16x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:

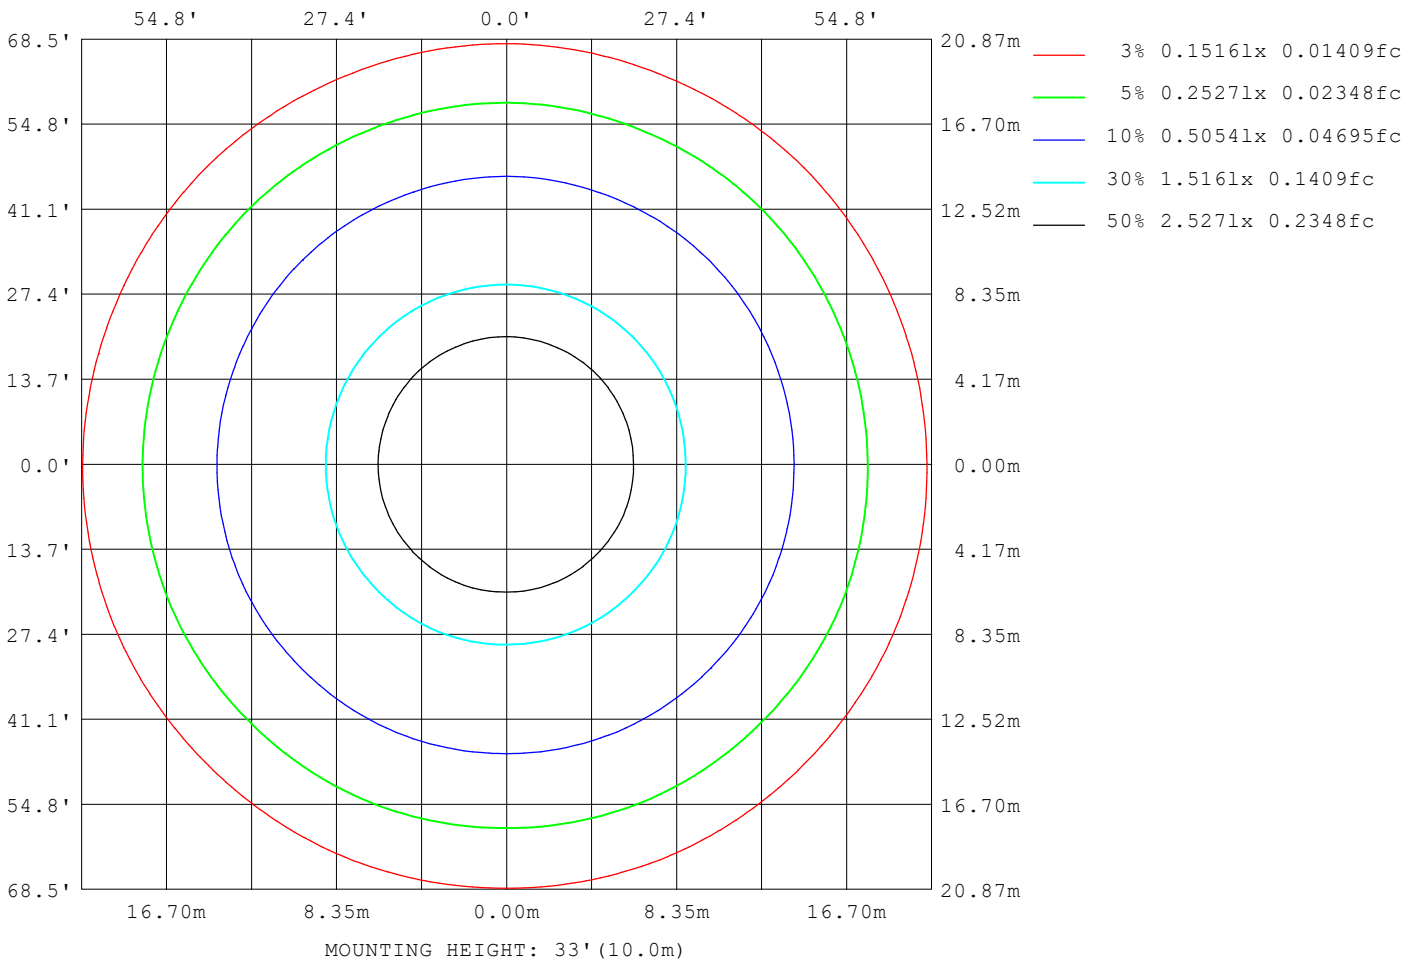

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.78V I:0.1065A P:12.551W PF:0.9843 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1430.16x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1342519
L_0~180 (75) av	1120091
L_0~180 (85) av	395675
L_90~270 (65) av	1344062
L_90~270 (75) av	1153298
L_90~270 (85) av	734781
L_45 (65) av	1342568
L_45 (75) av	1143335
L_45 (85) av	555495

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks:

Planar Illuminance Curve

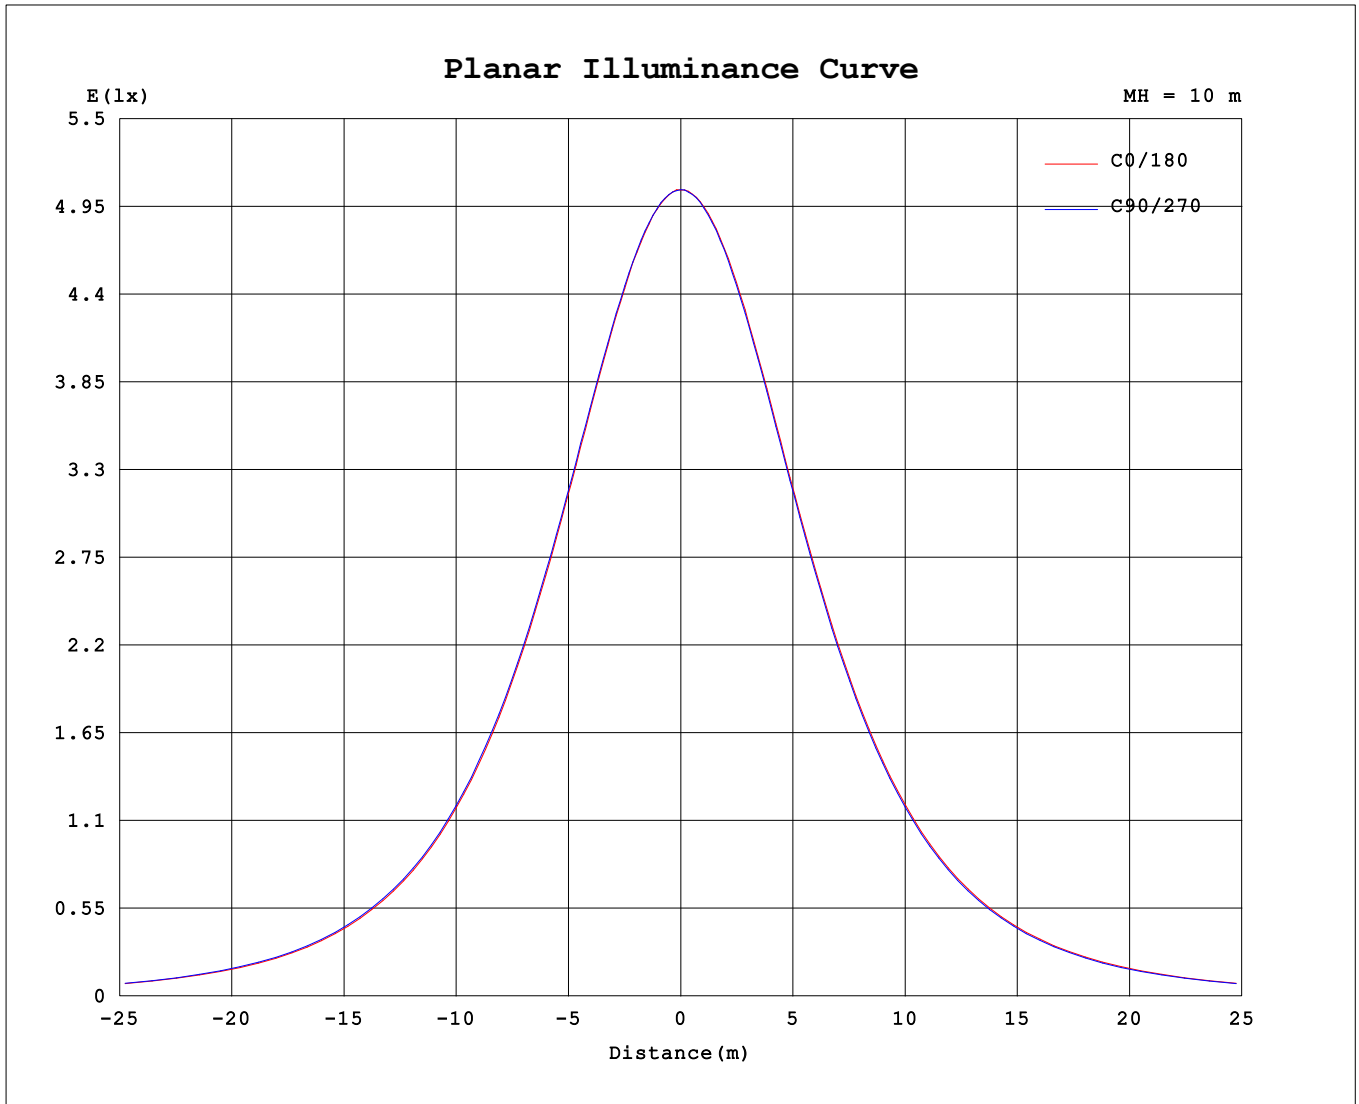

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.087m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.78V I:0.1065A P:12.551W PF:0.9843 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1430.16x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

γ (DEG)	C (DEG)															
	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5
0	505	505	506	505	506	505	505	505	505	505	506	505	506	505	505	505
5	503	502	502	503	503	504	503	503	504	504	504	503	503	503	502	503
10	495	496	495	496	496	497	497	497	497	497	497	496	496	496	495	495
15	483	484	484	485	485	486	486	487	487	487	486	485	485	484	483	483
20	467	468	468	469	469	471	471	471	471	471	470	470	469	468	468	467
25	447	449	448	450	450	451	452	452	452	452	451	450	450	448	448	448
30	424	425	425	427	427	428	429	429	429	428	428	426	426	424	424	424
35	397	399	399	400	401	402	402	402	402	401	401	399	399	397	398	397
40	366	369	369	370	371	373	372	373	373	371	371	369	369	367	367	367
45	334	336	336	338	338	340	339	340	340	338	337	335	335	333	334	333
50	297	300	300	303	302	304	303	304	304	301	301	299	299	297	298	297
55	259	261	262	264	264	265	264	265	264	262	262	260	260	258	259	258
60	218	221	221	224	223	225	223	224	223	221	221	218	219	216	218	217
65	175	178	179	182	181	182	181	182	181	179	178	175	176	173	175	174
70	132	136	136	139	138	140	138	139	138	135	135	133	133	131	132	131
75	88.5	91.7	93.9	96.8	96.9	97.7	96.4	95.5	93.5	92.0	92.4	91.1	90.6	89.2	89.1	88.0
80	47.1	49.9	52.8	56.4	57.5	57.9	55.5	53.3	51.3	50.2	51.1	51.2	51.5	49.9	48.5	46.7
85	9.91	12.3	16.0	20.8	22.9	22.1	18.1	15.0	11.7	11.7	13.7	15.9	17.3	15.8	12.9	10.4
90	0.56	0.56	0.59	0.61	0.95	0.73	0.58	0.57	0.36	0.36	0.38	0.41	0.41	0.40	0.38	0.37

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks: