
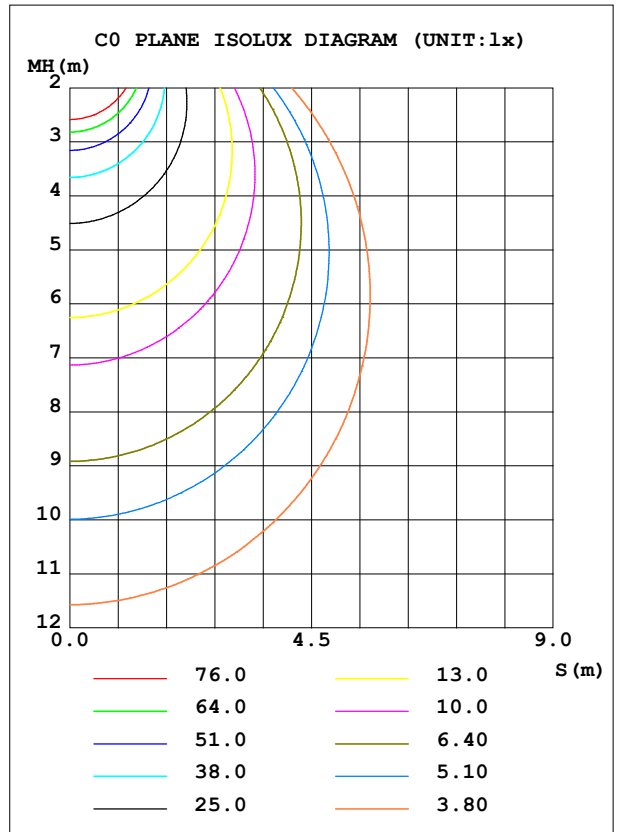


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.78V I:0.1091A P:12.864W PF:0.9848 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1440.98x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	RGL-FR-5CCT-6-WH	Imax (cd)	509.5	S/MH (C0/180)	1.26
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	1.25
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1441.0	η UP, DN (C0-180)	0.0, 50.2
NOMINAL FLUX (lm)	1440.98	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 49.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX	1.35

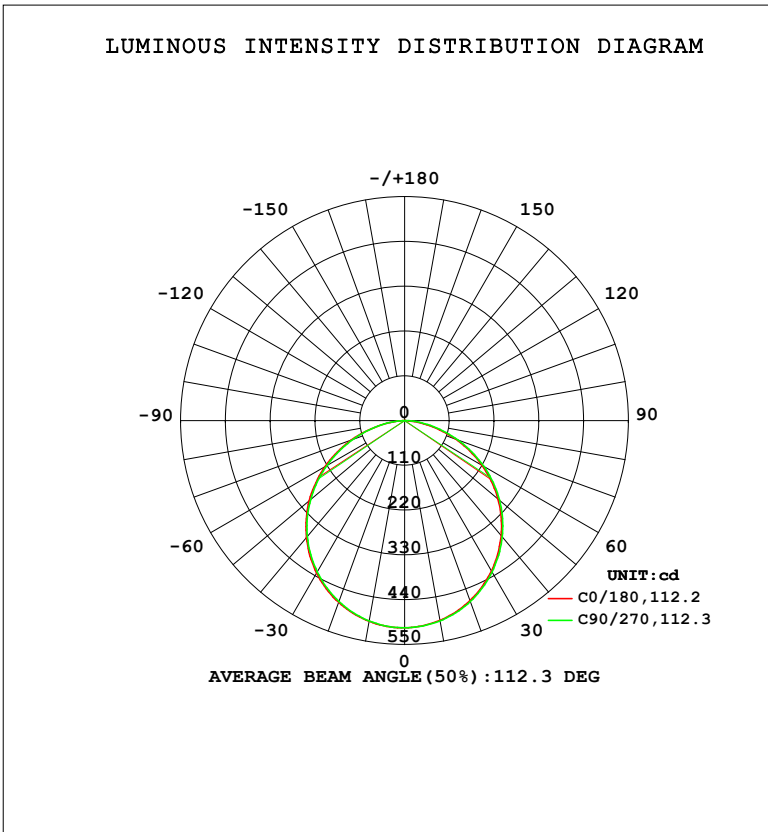

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.087m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	498.5	499.3	499.5	500.6	501.0	501.2	499.9	499.0	0- 10	48.15	48.15	3.34,3.34
20	470.5	471.4	472.8	474.0	474.9	474.7	472.6	471.4	10- 20	137.9	186.0	12.9,12.9
30	426.6	428.0	429.9	431.0	432.8	431.7	429.2	427.6	20- 30	208.8	394.9	27.4,27.4
40	369.2	371.2	373.2	374.8	375.7	374.1	371.8	370.0	30- 40	251.9	646.8	44.9,44.9
50	299.4	302.6	304.8	305.0	305.9	303.7	301.5	300.2	40- 50	261.5	908.3	63,63
60	219.1	222.2	224.6	224.6	225.4	223.1	220.3	219.4	50- 60	235.5	1144	79.4,79.4
70	133.1	137.1	139.3	139.1	139.1	136.6	133.9	133.0	60- 70	177.7	1321	91.7,91.7
80	47.49	53.06	57.83	55.97	51.86	51.64	52.06	48.97	70- 80	98.79	1420	98.6,98.6
90	0.5605	0.5874	0.9531	0.5939	0.3599	0.3800	0.4182	0.3774	80- 90	20.76	1441	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3 °C
 Operators:
 Test Date:2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:119.78V I:0.1091A P:12.864W PF:0.9848 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1440.98x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:

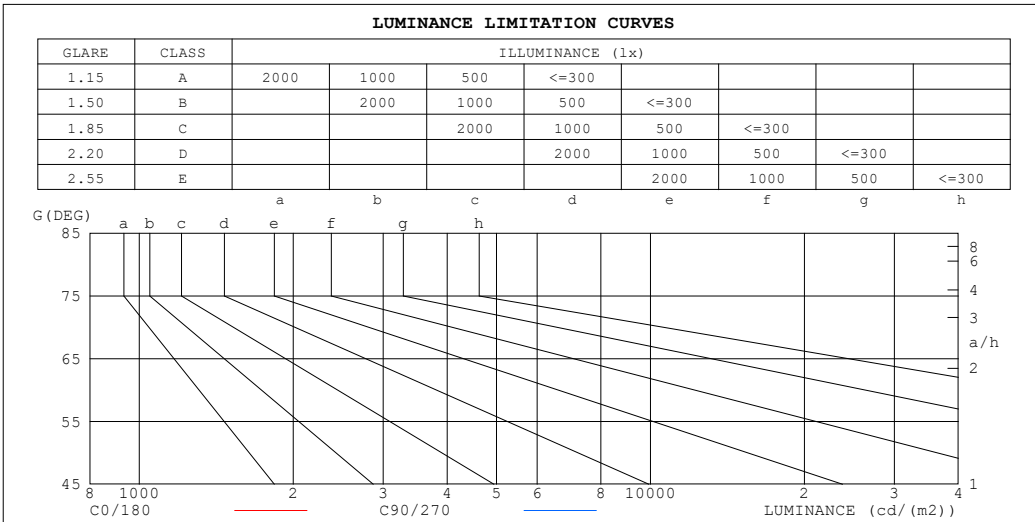

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	363335	839472
80	870979	1060538
75	1097374	1198887
70	1239179	1297012
65	1330362	1371719
60	1395700	1430800
55	1445416	1475493
50	1483602	1509927
45	1512026	1533402


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3°C
 Operators:
 Test Date: 2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.087m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:119.78V I:0.1091A P:12.864W PF:0.9848 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1440.98x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	.00	.96	1.02	.98	.95	.98	.94	.92	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.83	.77	.85	.80	.75	.82	.78	.74	.79	.75	.72	.70
3.0	.80	.71	.65	.78	.70	.64	.75	.69	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.71	.62	.55	.69	.61	.55	.67	.59	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.46	.58	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.51	.45	.40	.38
7.0	.51	.43	.36	.51	.42	.36	.49	.41	.36	.48	.41	.36	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.44	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.34	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.26	.39	.31	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

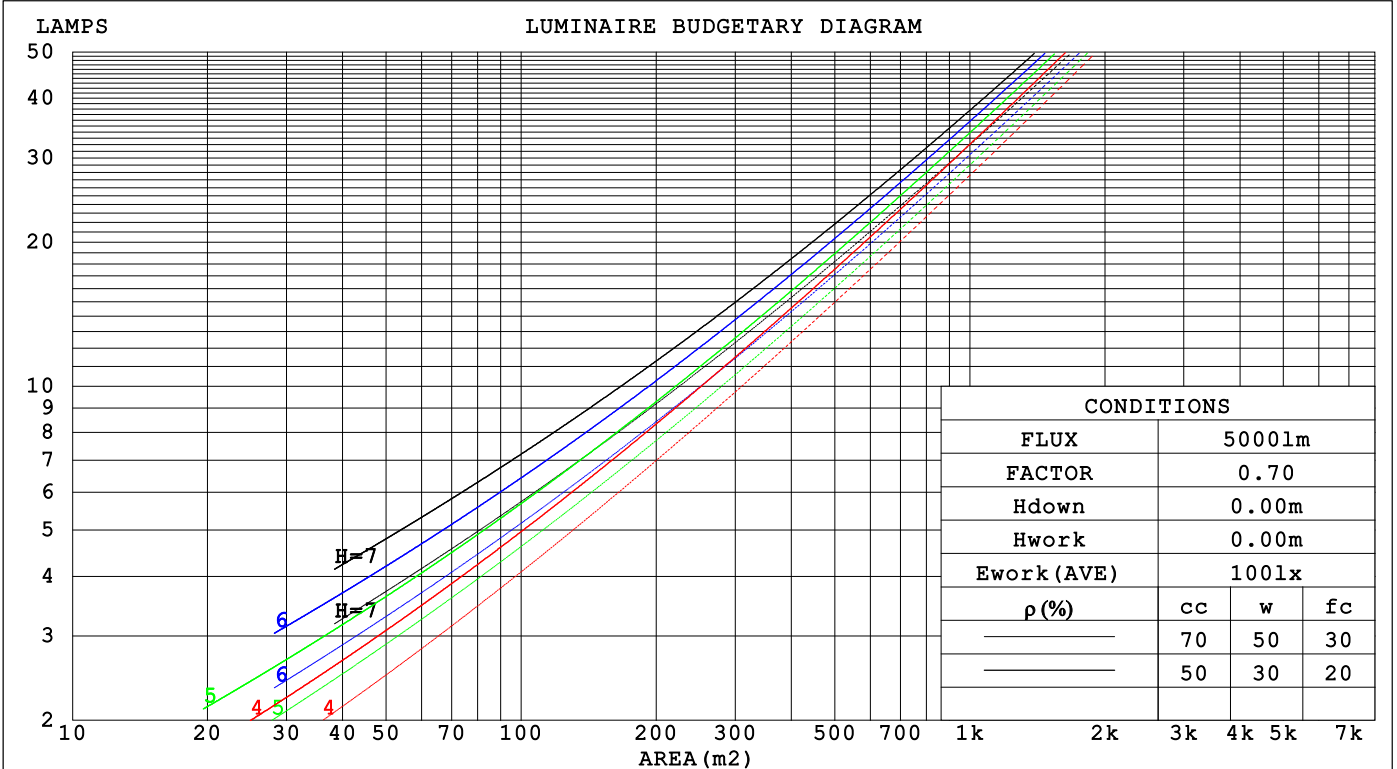

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:119.78V I:0.1091A P:12.864W PF:0.9848 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1440.98x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.305	.173	.055	.298	.170	.054	.284	.163	.052	.272	.157	.050	.261	.151	.049	
2.0	.289	.158	.049	.283	.156	.048	.271	.151	.047	.260	.146	.046	.250	.142	.045	
3.0	.268	.143	.043	.263	.141	.042	.252	.137	.042	.243	.133	.041	.234	.130	.040	
4.0	.248	.129	.038	.243	.127	.038	.234	.124	.037	.225	.121	.037	.218	.118	.036	
5.0	.230	.117	.034	.225	.116	.034	.217	.113	.033	.210	.111	.033	.202	.108	.033	
6.0	.213	.107	.031	.209	.106	.030	.202	.104	.030	.195	.101	.030	.189	.099	.030	
7.0	.198	.098	.028	.195	.097	.028	.188	.095	.027	.182	.094	.027	.177	.092	.027	
8.0	.185	.091	.025	.182	.090	.025	.177	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.163	.078	.022	.161	.078	.022	.156	.077	.022	.152	.075	.021	.148	.074	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.135	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015	
2.0	.172	.132	.098	.147	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.164	.114	.075	.141	.099	.065	.097	.068	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.058	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.149	.091	.047	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.129	.069	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.004	
9.0	.123	.065	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:119.78V I:0.1091A P:12.864W PF:0.9848 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1440.98x1 lm										
NAME: RGL-FR-5CCT-6-WH					TYPE:			WEIGHT:		
SPEC.: 5000K					DIM.:			SERIAL No.:		
MFR.: MAGIC LITE					SUR.:			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	38.2	39.7	38.5	39.9	40.1	38.3	39.8	38.5	40.0	40.2
3H	39.6	41.1	39.9	41.3	41.5	39.8	41.2	40.1	41.4	41.7
4H	40.2	41.5	40.5	41.8	42.0	40.4	41.7	40.7	42.0	42.2
6H	40.5	41.8	40.8	42.0	42.3	40.8	42.1	41.1	42.3	42.6
8H	40.6	41.8	40.9	42.1	42.4	40.9	42.1	41.3	42.4	42.7
12H	40.6	41.7	40.9	42.0	42.3	41.0	42.1	41.3	42.4	42.7
4H 2H	38.8	40.1	39.1	40.4	40.6	38.9	40.2	39.2	40.5	40.7
3H	40.4	41.6	40.8	41.9	42.2	40.6	41.7	40.9	42.0	42.3
4H	41.1	42.2	41.5	42.5	42.8	41.3	42.4	41.7	42.7	43.0
6H	41.5	42.5	41.9	42.8	43.2	41.8	42.8	42.2	43.1	43.5
8H	41.6	42.5	42.0	42.9	43.3	42.0	42.9	42.4	43.2	43.6
12H	41.6	42.5	42.1	42.8	43.2	42.1	42.9	42.5	43.3	43.7
8H 4H	41.4	42.2	41.8	42.6	43.0	41.5	42.4	41.9	42.8	43.2
6H	41.9	42.6	42.4	43.1	43.5	42.2	42.9	42.6	43.3	43.8
8H	42.1	42.7	42.5	43.1	43.6	42.4	43.1	42.9	43.5	44.0
12H	42.1	42.7	42.6	43.1	43.6	42.6	43.2	43.1	43.6	44.1
12H 4H	41.4	42.2	41.8	42.6	43.0	41.5	42.3	42.0	42.7	43.1
6H	42.0	42.6	42.4	43.0	43.5	42.2	42.9	42.7	43.3	43.8
8H	42.1	42.7	42.6	43.2	43.6	42.5	43.1	43.0	43.5	44.0
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				

CIE Pub.117, 1441 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 1.3)
 Area: 0.000314 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:119.78V I:0.1091A P:12.864W PF:0.9848 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1440.98x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	45	39	32
0.80	68	56	49	67	56	49	65	55	48	41
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	65	79	71	65	57
1.50	88	78	72	87	78	71	84	76	70	62
2.00	95	87	80	93	86	80	90	83	78	70
2.50	99	91	85	97	90	85	93	87	83	74
3.00	102	96	90	100	94	89	96	91	87	79
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	99	102	99	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:119.78V I:0.1091A P:12.864W PF:0.9848 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1440.98x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:

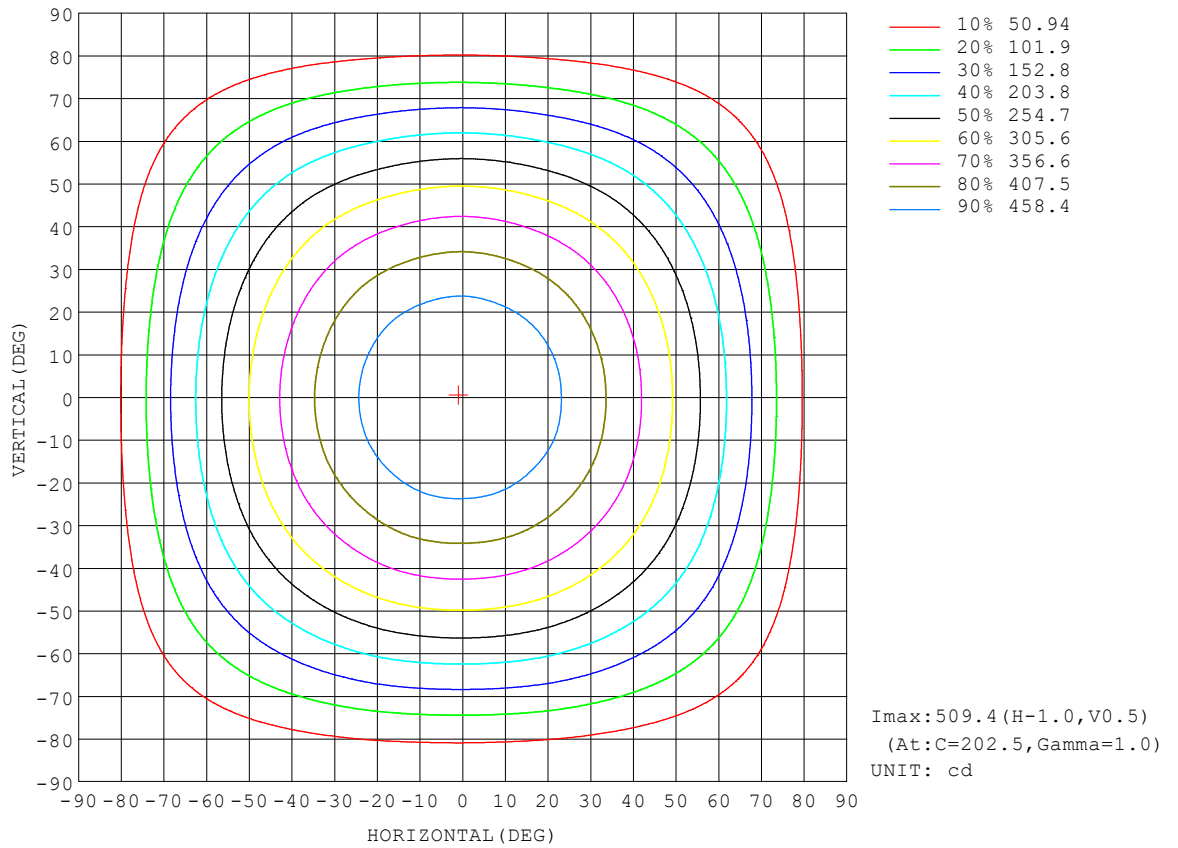


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks:

AAI CURVES

Test:U:119.78V I:0.1091A P:12.864W PF:0.9848 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1440.98x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:

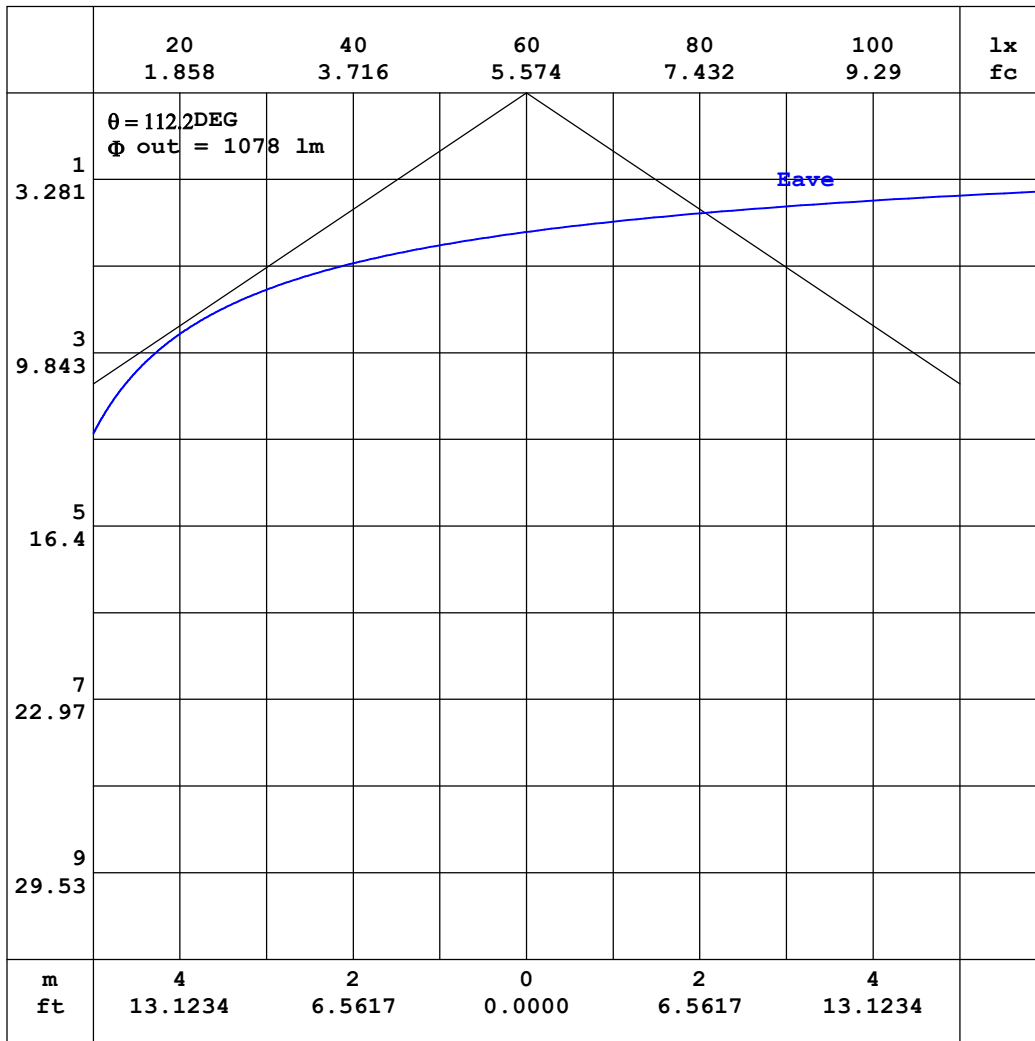


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3°C
 Operators:
 Test Date: 2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.087m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:119.78V I:0.1091A P:12.864W PF:0.9848 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1440.98x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:

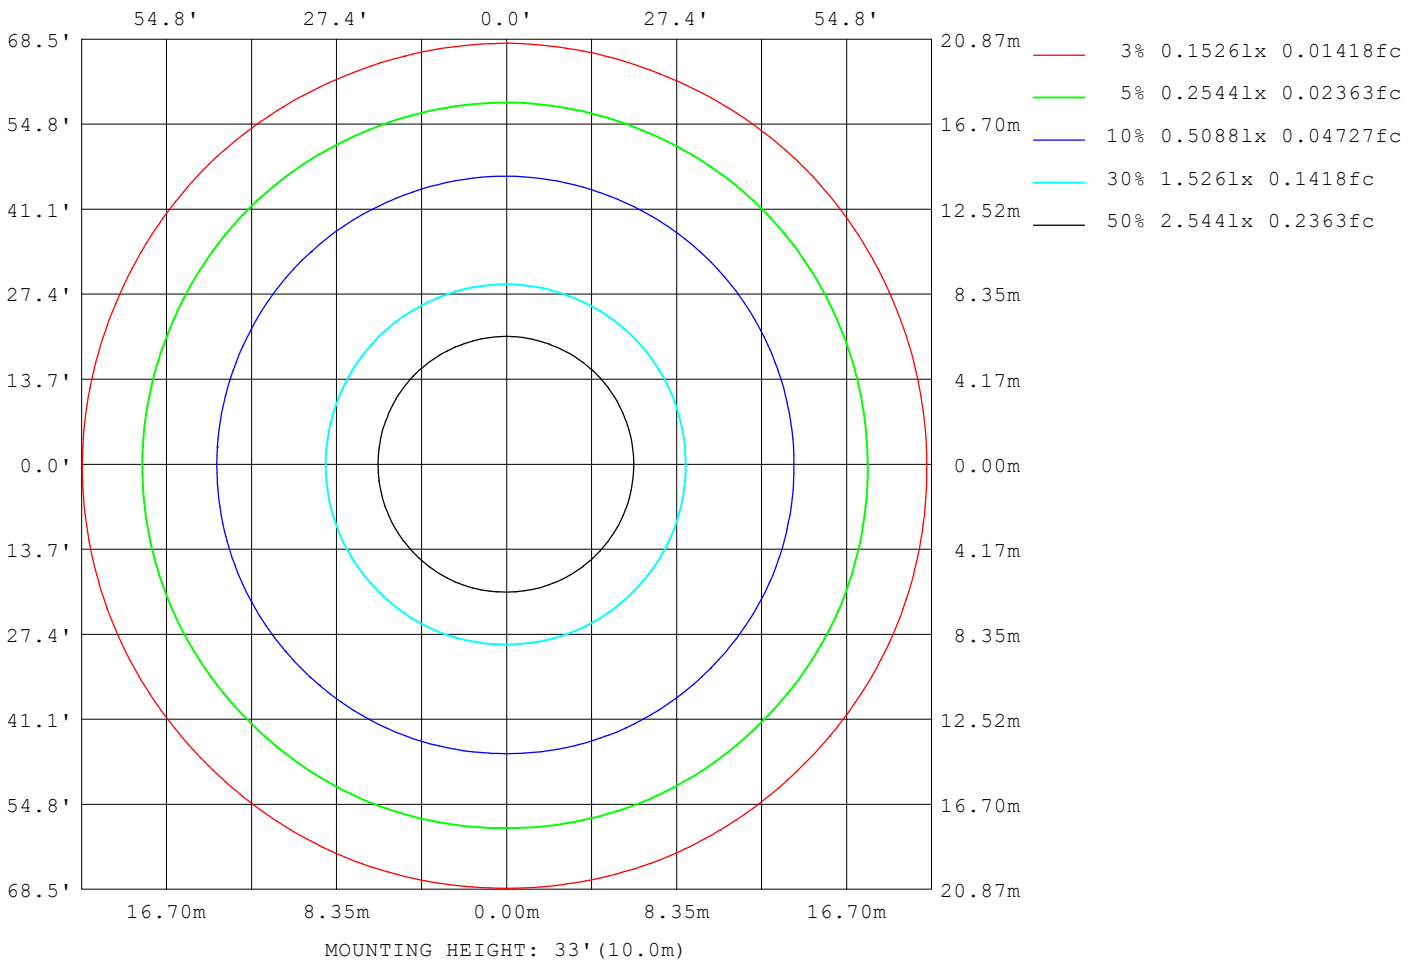

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3°C
 Operators:
 Test Date: 2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.087m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:119.78V I:0.1091A P:12.864W PF:0.9848 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1440.98x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1353320
L_0~180 (75) av	1129670
L_0~180 (85) av	399793
L_90~270 (65) av	1354578
L_90~270 (75) av	1161681
L_90~270 (85) av	740442
L_45 (65) av	1352989
L_45 (75) av	1152167
L_45 (85) av	560178

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3℃
 Operators:
 Test Date:2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks:

Planar Illuminance Curve

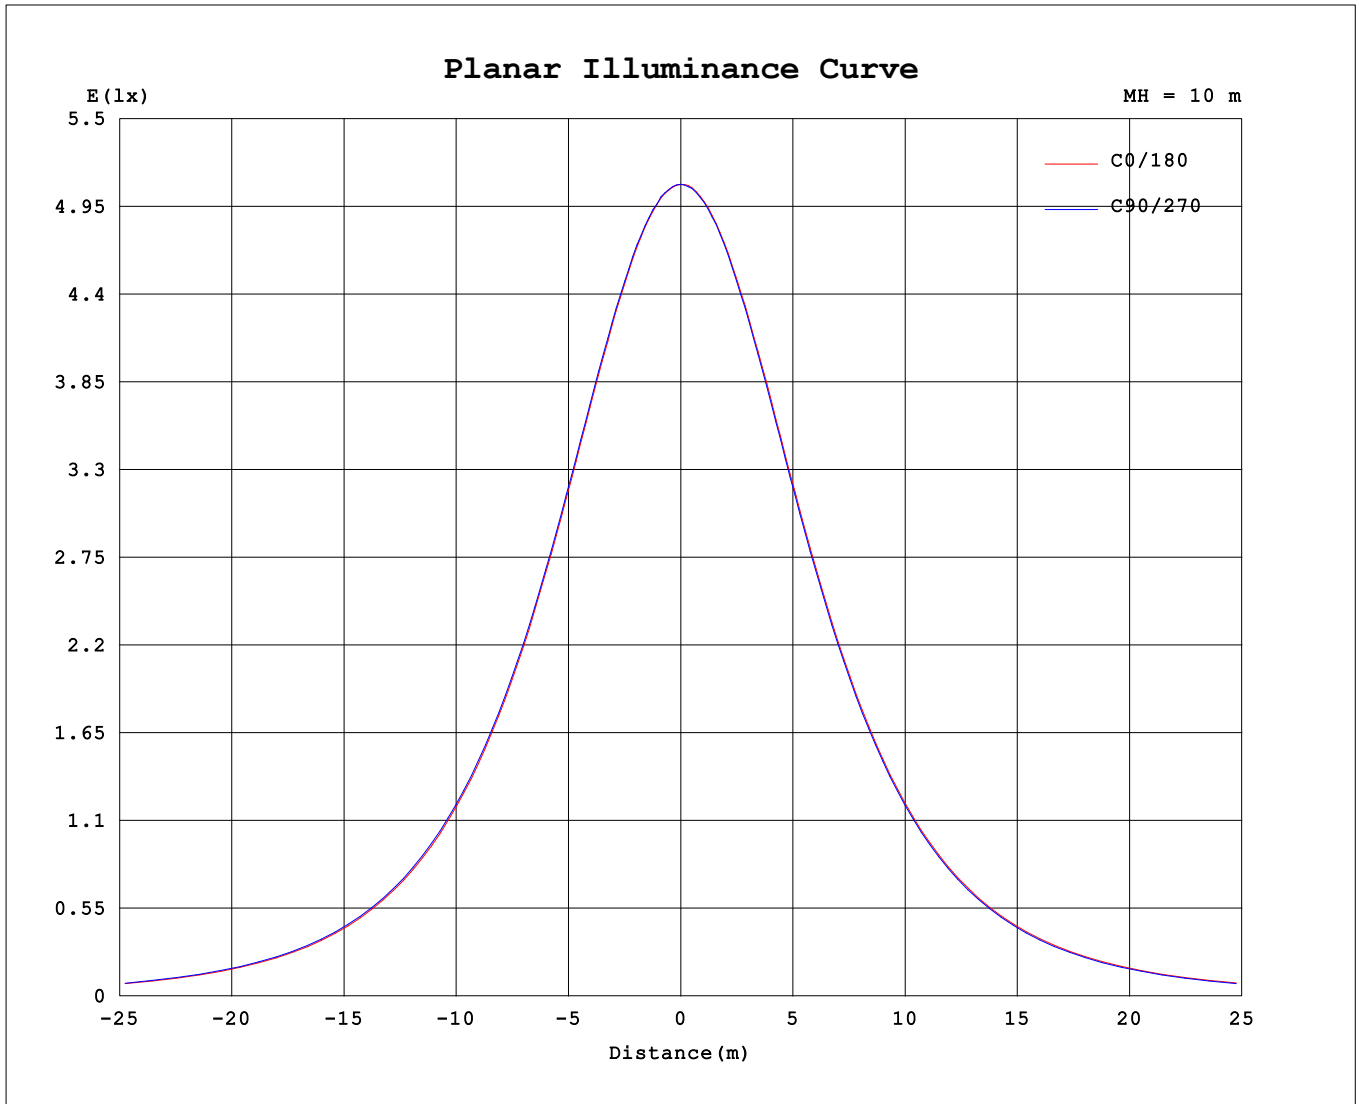

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 24.3 °C
 Operators:
 Test Date: 2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.087m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:119.78V I:0.1091A P:12.864W PF:0.9848 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1440.98x1 lm		
NAME: RGL-FR-5CCT-6-WH	TYPE:	WEIGHT:
SPEC.: 5000K	DIM.:	SERIAL No.:
MFR.: MAGIC LITE	SUR.:	Shielding Angle:

Table--1

UNIT: cd

C (DEG) \ γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	509	509	509	509	509	509	509	509	509	509	509	509	509	509	509	509			
5	506	506	506	506	507	507	507	508	507	507	508	507	506	507	506	507			
10	498	499	499	500	499	500	501	501	501	501	501	500	500	499	499	499			
15	487	487	487	488	488	490	489	490	490	490	490	488	488	488	487	487			
20	471	472	471	473	473	474	474	475	475	474	475	473	473	471	471	471			
25	451	452	452	453	453	455	455	456	456	455	455	453	453	451	452	451			
30	427	428	428	430	430	432	431	432	433	432	432	429	429	428	428	427			
35	399	401	401	403	403	405	405	406	406	405	405	402	402	401	401	399			
40	369	371	371	374	373	375	375	376	376	374	374	372	372	370	370	369			
45	336	338	338	341	340	342	341	342	342	341	340	338	338	336	337	336			
50	299	302	303	305	305	306	305	306	306	304	304	301	302	300	300	299			
55	260	263	263	266	266	267	266	267	267	264	264	262	262	260	261	260			
60	219	222	222	225	225	226	225	226	225	223	223	220	220	218	219	219			
65	177	180	180	183	182	184	182	183	183	180	180	177	177	175	176	175			
70	133	136	137	140	139	141	139	140	139	136	137	134	134	132	133	132			
75	89.2	92.1	94.4	97.4	97.4	98.4	97.0	96.2	94.4	92.9	93.3	92.0	91.4	90.1	89.8	88.7			
80	47.5	50.1	53.1	56.8	57.8	58.3	56.0	53.9	51.9	50.7	51.6	51.7	52.1	50.5	49.0	47.1			
85	9.94	12.3	16.1	20.9	23.0	22.2	18.3	15.1	11.9	11.8	13.9	16.0	17.6	16.1	13.1	10.5			
90	0.56	0.57	0.59	0.62	0.95	0.73	0.59	0.58	0.36	0.37	0.38	0.41	0.42	0.40	0.38	0.36			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.3°C
 Operators:
 Test Date:2024-12-11

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.087m [K=1.0000]
 Remarks: